




HV TESTERS WITH COMBINED SIGNALLING

- outdoor design


type 103 ...

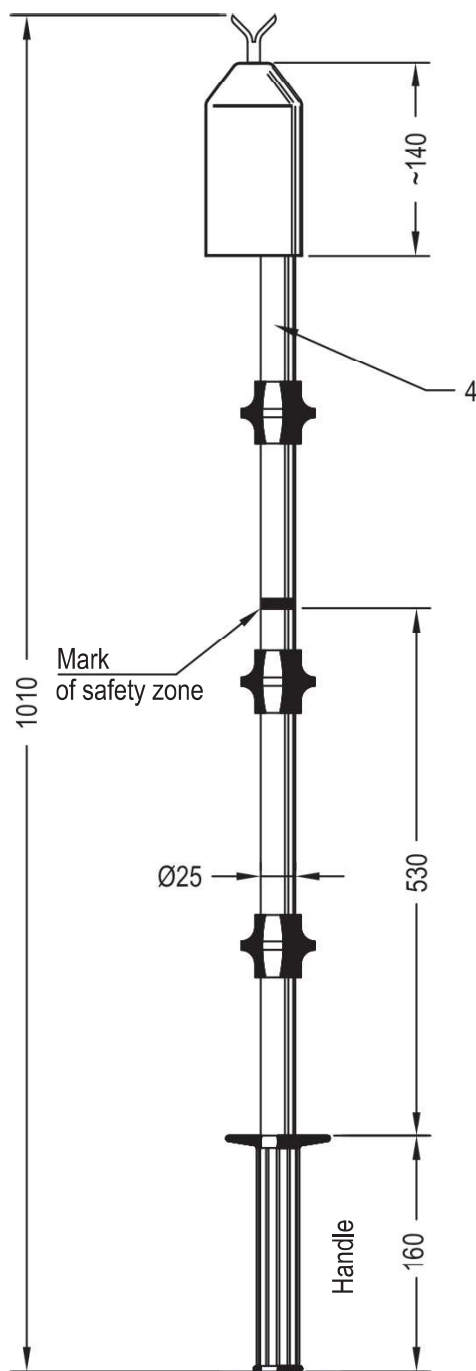

TYPE	NOMINAL VOLTAGE OF TESTER
103 003	3,6kV
103 006	7,2kV
103 010	12kV
103 022	25kV
103 025	27,5kV
103 035	38,5kV

SIGNALLING SYSTEM

- 1) Button for testing
- 2) LED diodes
- 3) Sound pipe
- 4) Insulating rod

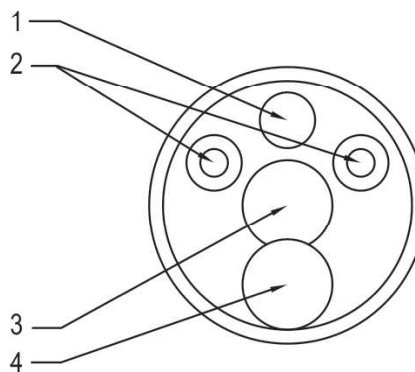

SPECIFICATION

- The product complies with the PNE 359700 and ČSN EN 61243-1
- Nominal voltage: 3,6 kV – 38,5 kV
- The capacitance tester, frequency 50 Hz
- Power supply: 1.5 V AA batteries - 4 pcs
- Use category: outdoor
- Climate class: N (-25°C to + 55°C)
- Design category: L - no extended touch electrodes, Group indication - III
- Weight: 0.7 kg
- The tester is delivered in case