




SHORT-CIRCUITING SET 123kV

type 156 110

Short-circuiting set for tubular line wire with max. voltage 123 kV.

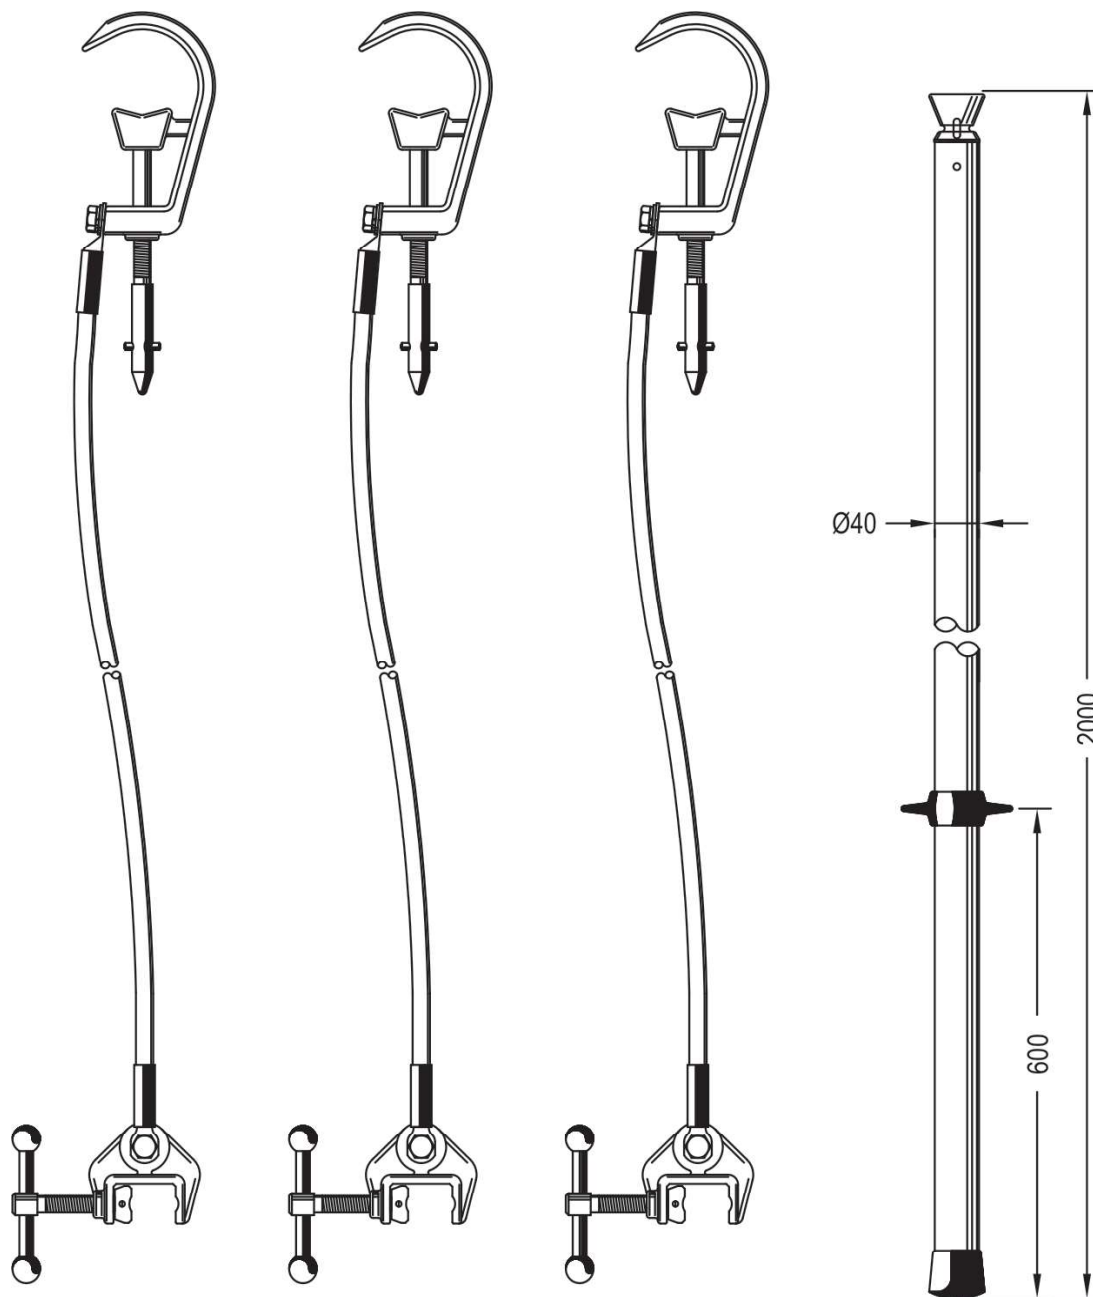

SPECIFICATION

Attachable to:	Short-circuit resistance	10 kA/1s	15 kA/1s	19 kA/1s
- tubular conductor Ø 70 - 100 mm		13,9 kA/0,5s	19,5 kA/0,5s	26,5 kA/0,5s
	Rope's cross-section	50 mm ²	70 mm ²	95 mm ²
	Rope's length	4 000 mm	4 000 mm	4 000 mm
	One-piece insulating rod	1 piece	1 piece	1 piece
	Set's weight	12,5 kg	15,5 kg	18,5 kg