




SHORT-CIRCUITING SET 245kV

type 154 220

Short-circuiting set for overhead line with max. voltage 245 kV.

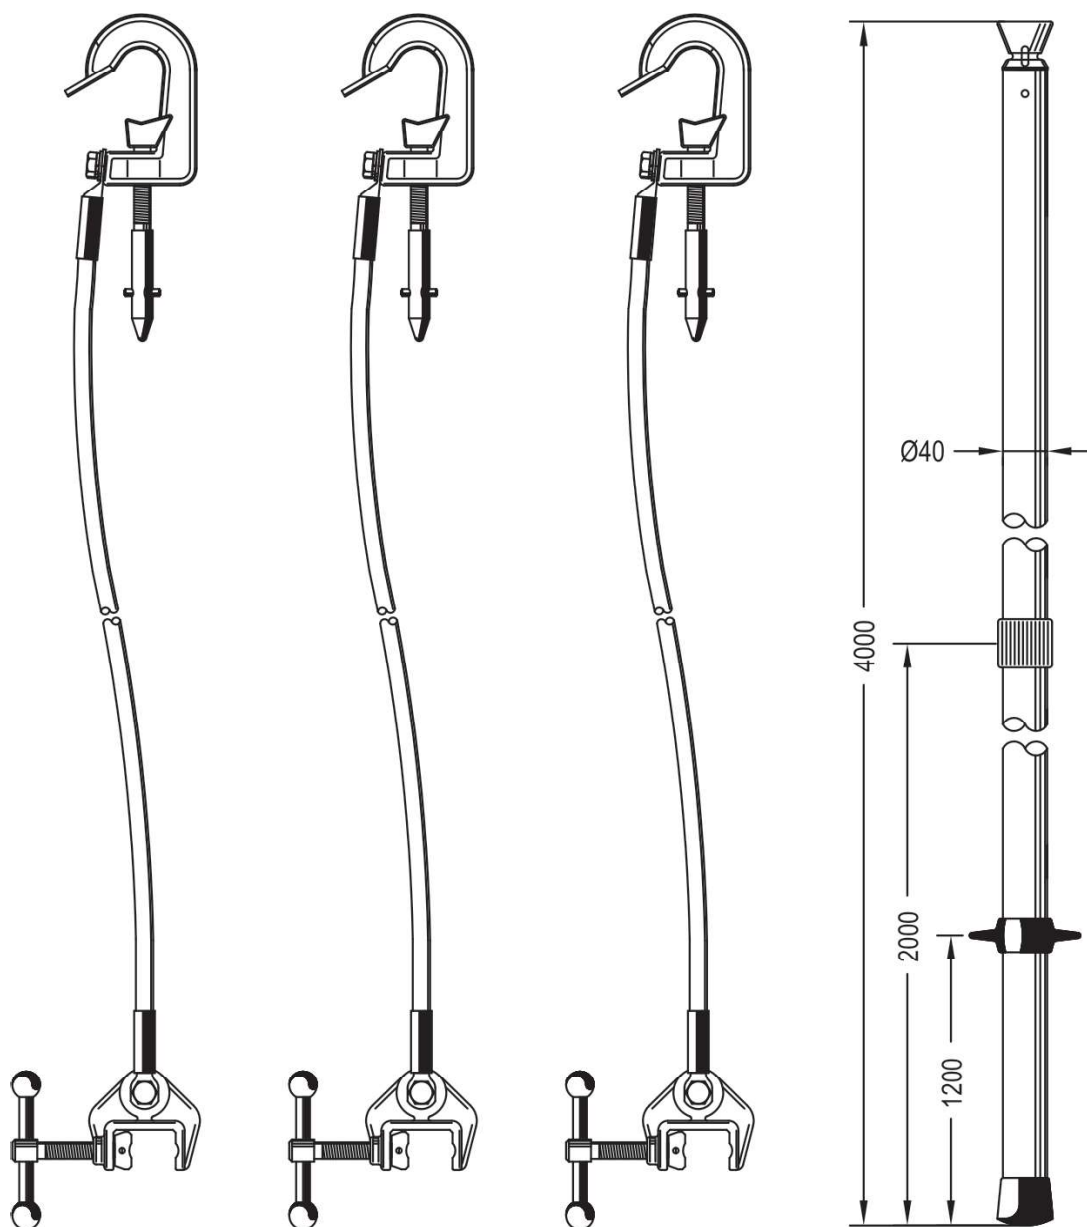

SPECIFICATION

Attachable to:		Short-circuit resistance	10 kA/1s	15 kA/1s	19 kA/1s
- circular conductor	Ø 10-45 mm		13,9 kA/0,5s	19,5 kA/0,5s	26,5 kA/0,5s
- short-circuit point	type 163110	Rope's cross-section	50 mm ²	70 mm ²	95 mm ²
		Rope's length	4 500 mm	4 500 mm	4 500 mm
		Two-piece insulating rod	1 piece	1 piece	1 piece
		Set's weight	17 kg	20 kg	23 kg