




SHORT-CIRCUITING SET 245kV

type 156 220

Short-circuiting set for tubular line wire with max. voltage 245 kV.

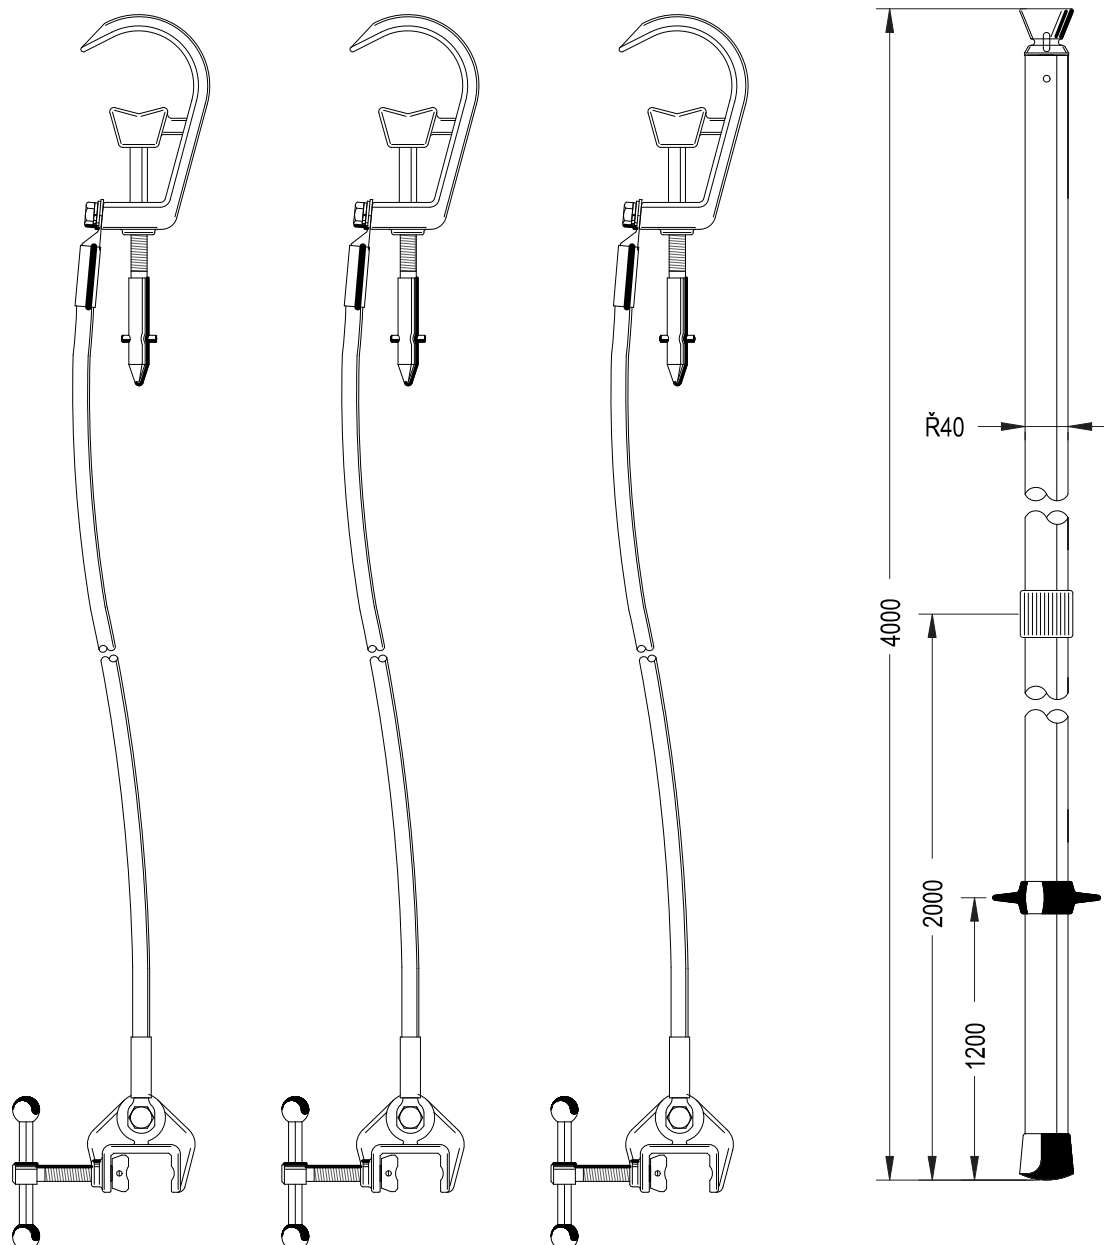

SPECIFICATION

Attachable to:	Short-circuit resistance	10 kA/1s	15 kA/1s	19 kA/1s
- tubular conductor Ø 70-100 mm		13,9 kA/0,5s	19,5 kA/0,5s	26,5 kA/0,5s
	Rope's cross-section	50 mm ²	70 mm ²	95 mm ²
	Rope's length	4 (6) m	4 (6) m	4 (6) m
	Two-piece insulating rod	1 piece	1 piece	1 piece
	Set's weight [kg]	13,5 (16,5)	16,5 (21)	19,5 (25,5)