




SHORT-CIRCUITING SET TH

type 151 025

This short-circuiting set is designed to be used on contact line of circuitry with direct (DT) or alternating (AC) voltage up to 27,5 kV.

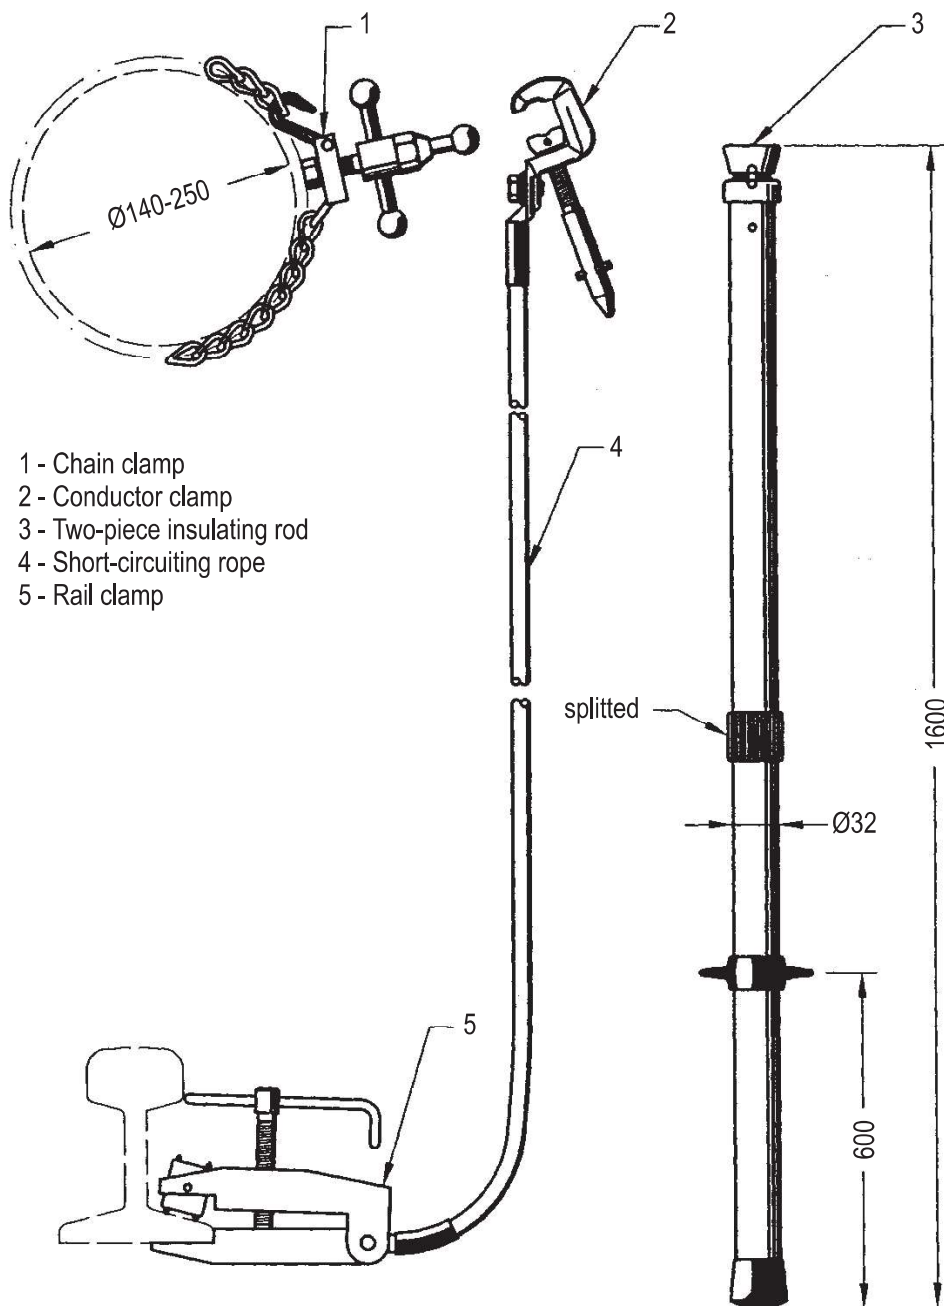

- 1 - Chain clamp
- 2 - Conductor clamp
- 3 - Two-piece insulating rod
- 4 - Short-circuiting rope
- 5 - Rail clamp

SPECIFICATION

Attachable to:

- ball-shaped point Ø 20 mm
- flat conductor up to ≠ 20 mm
- circular conductor Ø 5 - 20 mm
- T-point Ø 15 mm

Nominal voltage of device	27,5 kV
Current capacity	800 A/ 10 min
Short-circuit resistance	10 kA/ 1 sec
Rope's cross-section	50 mm ²
Rope's length	4 000 mm
Weight	7,7 kg
Short-circuiting set is delivered in case	