


type 153 025

EP

Shunting set BS is designed to create safety conductive connection of conductive parts of insulated working platform with contact line or to create safety switch-over of electric split of the contact line.

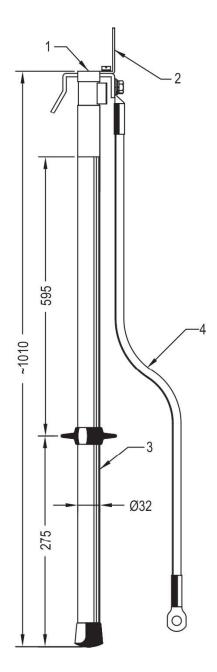

- 1 Conductor clamp
- 2 Testing point
- 3 Insulating rod
- 4 Interconnection rope

SPECIFICATION -

Attachable to:

- trolley conductor 80-150 mm²
- satisfy TNŽ 359708, ČSN EN 61230

Nominal voltage of device Current capacity Short-circuit resistance Rope's cross-section Rope's length Weight 27,5 kV 800 A/10 min 10 kA/ 1 sec; 5 kA/ 5 sec 50 mm² 1 350 mm 2,1 kg