




SHORT-CIRCUITING SET 38,5kV

type 152 035

General-purpose short-circuiting set for overhead line with max. voltage 38,5 kV.

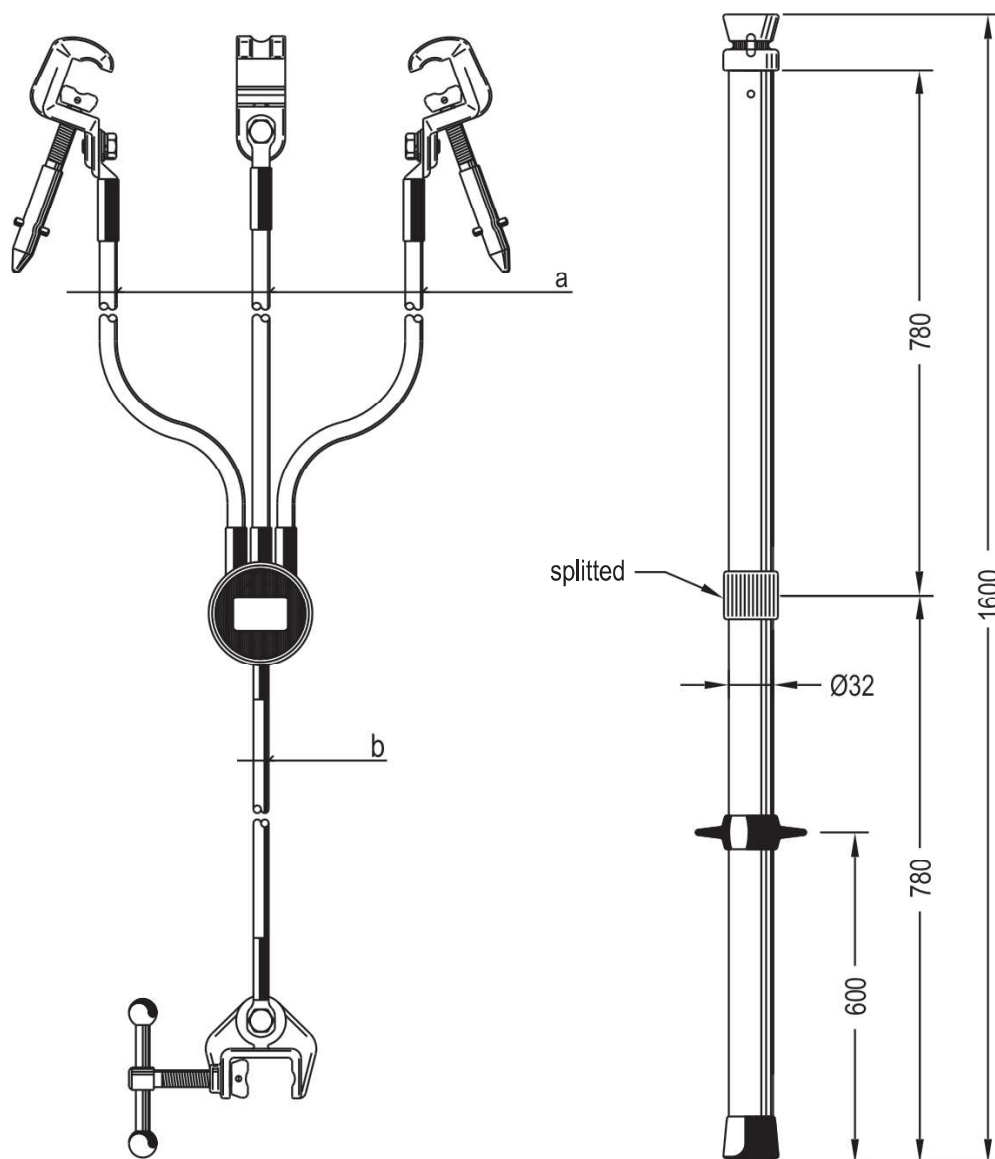

Note: It is necessary to specify demanded short-circuiting resistance in the order.

SPECIFICATION

Attachable to:		Short-circuit resistance	6 kA/1s	8 kA/1s	10 kA/1s	
- circular conductor	Ø 5-20 mm	Rope's cross-section	a	25 mm ²	35 mm ²	50 mm ²
- flat line wire up to	≠ 20 mm		b	25 mm ²	25 mm ²	25 mm ²
- ball-shaped point	Ø 20 mm	Rope's length	a	2 000 mm	2 000 mm	2 000 mm
- T-point	Ø 15 mm		b	1 500 mm	1 500 mm	1 500 mm
The set is delivered in case.		Two-piece insulating rod	1 piece	1 piece	1 piece	
		Set's weight	6,5 kg	7 kg	7,5 kg	