




SHORT-CIRCUITING SET 38,5kV

type 153 035

General-purpose short-circuiting set for overhead line with max. voltage 38,5 kV

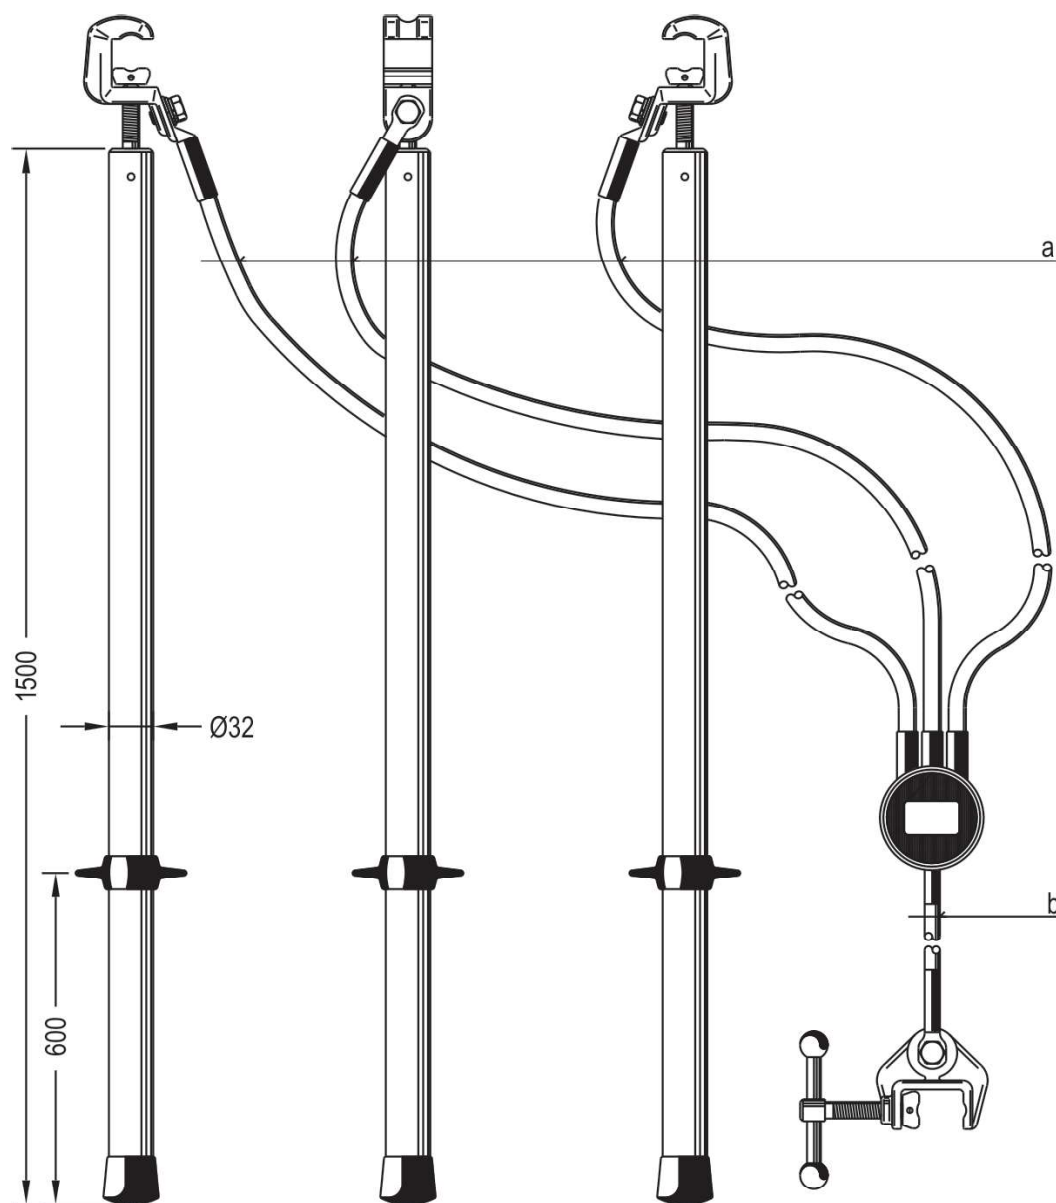

Note: It is necessary to specify demanded short-circuiting resistance in the order.

SPECIFICATION

Attachable to:		Short-circuit resistance	6 kA/1s	8 kA/1s	10 kA/1s
- circular conductor	Ø 5-20 mm	Rope's cross-section	a 25 mm ²	35 mm ²	50 mm ²
- flat line wire up to	≠ 20 mm	b 25 mm ²		25 mm ²	25 mm ²
- ball-shaped point	Ø 20 mm	Rope's length	a 2 000 mm	2 000 mm	2 000 mm
- T-point	Ø 15 mm	b 1 500 mm	1 500 mm	1 500 mm	1 500 mm
		Insulating rod	3 pcs	3 pcs	3 pcs
		Set's weight	7,5 kg	8 kg	8,5 kg