




SHORT-CIRCUITING SET 38,5kV

type 151 035

General-purpose short-circuiting set for distribution substation with voltage up to 38,5 kV.

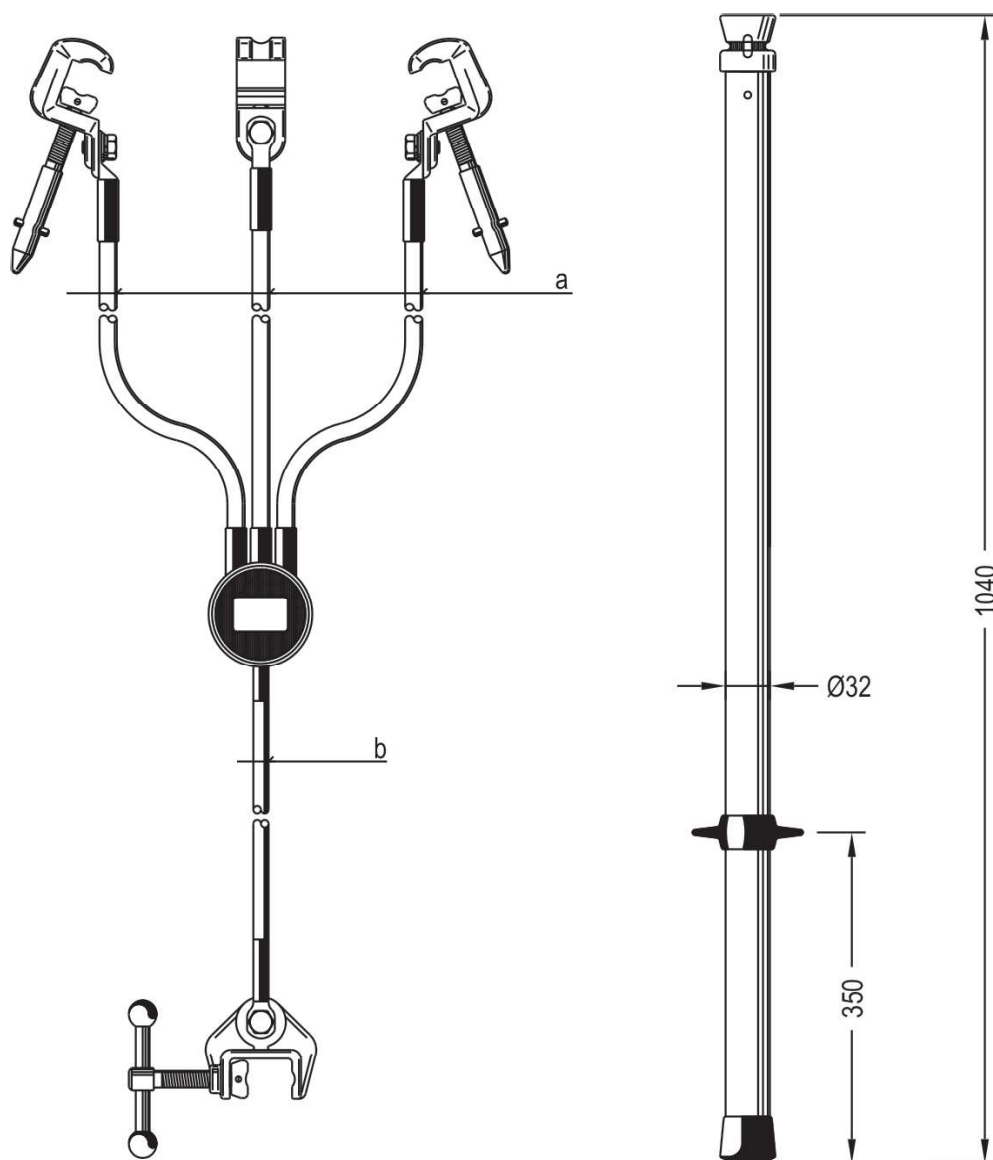

Note: It is necessary to specify demanded short-circuiting resistance in the order and delivery of transport case in case of need.

SPECIFICATION

Attachable to:

- ball-shaped point $\varnothing 20 \text{ mm}$
- flat line wire up to $\neq 20 \text{ mm}$
- circular conductor $\varnothing 5\text{-}20 \text{ mm}$
- T-point $\varnothing 15 \text{ mm}$

Short-circuiting resistance	10 kA/1s	15 kA/1s
Rope's cross-section	a 50 mm^2	70 mm^2
	b 25 mm^2	35 mm^2
Rope's length	a 800 mm	800 mm
	b 1 500 mm	1 500 mm
Insulating rod	1 piece	1 piece
Set's weight	5,5 kg	6,25 kg