/ ARCSAL40

Arc Flash coveralls, APC 2, ATPV 40 cal/cm², ELIM 37 cal/cm²

See online technical sheet



/ Standards

- **EN ISO 11612:2015 (Flamme and heat)** : A1, A2, B1, C1, F1
- **EN1149 (Electrostatic property)** : EN1149-5
- **EN 61482:2** : APC 2 (7Ka)
- **EN 61482-1-1**
- **ATPV (cal/cm²)** : 40
- **ELIM (cal/cm²)** : 36
- **EN ISO 13688**
- **CE category** : Catégory 3

/ Use

For occasional operations; Switching operations to disconnect or open the network, on electrical installations with incident thermal energy up to 40 cal/cm².
Protection against thermal effects of an electric arc.


/ Advantages

- Loose fit for greater comfort and mobility
- The FR (flame retardant) properties of the garment are guaranteed for 50 washes
- Very good mechanical strength (abrasion and tear resistance)
- Double qualification according to ATPV and ELIM for OPEN ARC
- No metal parts (non-magnetic)
- Metal free
- ATPV protection level visible on garment
- Overlapping garments for optimum protection

Document not contractually binding, errors and omissions excepted

/ Technical specifications

- **Size :** S, M, L, XL, 2XL, 3XL, 4XL
- **Main color :** Grey
- **Workwear color :** Grey
- **Fastening :** Plastic clip buckles
- **Cloth composition table :** Tissu - 87% cotton 12% nylon 1% antistatic fiber - bom-precision/2-layer, 340 gsm

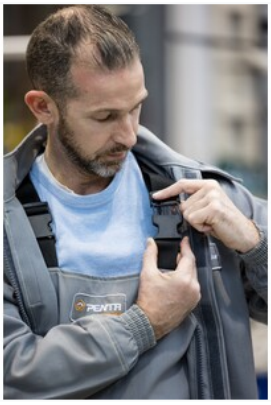





/ Accessories

	Reference	Designation
	CRYOVEST	Thermoregulating vest against heat risk and heat stress

Document not contractually binding, errors and omissions excepted

/ Measurement table

Size	Measurement type	Value	Measurement unit
S	Waist belt	70-77	cm
	Size	170-175	cm
M	Waist belt	78-85	cm
	Size	176-181	cm
L	Waist belt	86-93	cm
	Size	182-187	cm
XL	Waist belt	94-101	cm
	Size	188-194	cm
2XL	Waist belt	102-109	cm
	Size	188-194	cm
3XL	Waist belt	110-118	cm
	Size	190-196	cm
4XL	Waist belt	119-127	cm
	Size	190-196	cm

Document not contractually binding, errors and omissions excepted